

# ENHANCE

Paver Color

# RESTORE

Paver Beauty

# PROTECT

Your Investment



## Choose the Look You Want


### Penetrating = PS



Natural Look

Penetrating sealers create an invisible protective barrier. Also available in PSX Penetrating X-treme Commercial Grade.

### Low Gloss = LG

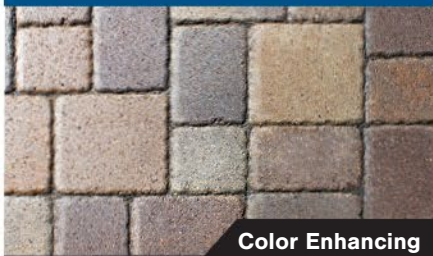

Color Enhancing

Low Gloss sealers create a protective barrier while providing a color-enhancing surface sheen.

### High Gloss = HG



Wet Look

High Gloss sealers provide protection with a wet look. Also available in HGX High Gloss X-treme Commercial Grade.

## Seal to Protect Your Investment



### Prevent Damage and Lock Out:

- ▶ Salt/Acid Rain
- ▶ Pool Chemicals
- ▶ Color Fade
- ▶ Surface Erosion
- ▶ Deep Staining
- ▶ Freeze/Thaw

In these images you can see how unsealed pavers allow moisture and contaminants to seep into the surface. In contrast, water and salt pools on top of the sealed surface.

## Choose the Best Formula for Your Paver Project

### 2 Levels of Protection

Choose the "X-treme" version for commercial-grade protection in high traffic areas.



OR



SRWI PRODUCTS <b>Paver Seal™</b> APPLICATION CHART	Surface Material			SRW Sealer Benefits					
	Concrete Pavers	Clay Pavers	Concrete Permeable Pavers	Penetrating/ Natural Look	Film-Forming/ Enhancing	Reduce Salt/ Frost Damage	Stabilizes Joint Sand	UV Resistance	Commercial Grade
<b>PS PENETRATING</b>	X	X	X	X		X			
<b>PSX PENETRATING X-TREME</b>	X	X	X	X		X			X
<b>LG LOW GLOSS</b>	X				X	X	X	X	
<b>HG HIGH GLOSS</b>	X				X	X	X	X	
<b>HGX HIGH GLOSS X-TREME</b>	X				X	X		X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.



**SEE HOW IT'S DONE:**

[www.YouTube.com/SRWproducts](http://www.YouTube.com/SRWproducts)

## Instructions Made Easy



SRW Paver Seal features this easy 4-step process to save time and money. SRW prides itself on offering user-friendly (yet detailed) instructions to assist in the success of your paver projects.

### EASY 4-STEP PROCESS

1 CLEAN	2 CLIMATE	3 APPLY	4 CURE
<ul style="list-style-type: none"> <li>• Wait 28 days after installing polymeric sand before sealing.</li> <li>• Thoroughly sweep surface of joint sand or loose material.</li> <li>• Spot clean if needed with one of these SRW cleaning products: <b>CD</b> = Cleaner &amp; Degreaser for oil and grease spots <b>RE</b> = Rust Eliminator for rust and mineral removal</li> <li>• Prepare all pavers with one of these SRW cleaning products: <b>EF</b> = for Efflorescence removal <b>PW</b> = Paver Wash for general cleaning &amp; polyhaze removal</li> </ul>	<ul style="list-style-type: none"> <li>• After cleaning, wait at least 24 hours before sealing. Surface and joints must be completely dry.</li> <li>• Recommended application temperatures are 50°F (10°C) to 80°F (27°C).</li> <li>• Do not apply if inclement weather is forecasted within 24 hours.</li> </ul>	<ul style="list-style-type: none"> <li>• <b>STIR THOROUGHLY.</b></li> <li>• Apply with an SRW Products approved Slit Foam Roller and sprayer.</li> <li>• Spray then back roll. This prevents an uneven finish. A 2-person application is recommended.</li> <li>• Always spray against a wet edge and do not overlap a previously sealed and dried area. (for PS &amp; PSX only)</li> <li>• Start at the highest project elevation.</li> <li>• Do not allow sealer to pool on pavers or in joints.</li> <li>• Repeat if desired. (Except PS &amp; PSX)</li> </ul>	<ul style="list-style-type: none"> <li>• Allow sealed area to dry and cure 24 hours.</li> <li>• Protect area from water and rain until dry.</li> <li>• Dry-tack free: 25 minutes</li> <li>• Foot traffic: 24 hours</li> <li>• Vehicle traffic: 72 hours</li> </ul> <p><i>Note: All calculations based on 68°F–77°F</i></p>



#### ONLINE RESOURCES

Scan QR code for how-to videos, calculator & more.  
<http://bit.ly/SRWcontractors>

# Sealers

# Paver Seal™

## PS Penetrating Paver Seal



### Benefits

- ▶ Invisible/natural-look finish
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Interior/exterior
- ▶ Makes paver maintenance easier

### More Info.



[bitly.com/PSsealer](http://bitly.com/PSsealer)

### Applications

- ▶ Concrete/Clay Pavers
- ▶ Concrete Permeable Pavers

*Not for use on structures under hydrostatic pressure*



## PSX Penetrating X-treme Paver Seal Commercial Grade



### Benefits

- ▶ Invisible/natural-look finish
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Ideal for high traffic or commercial areas
- ▶ Interior/exterior

### More Info.



[bitly.com/PSXsealer](http://bitly.com/PSXsealer)

### Applications

- ▶ Concrete/Clay Pavers
- ▶ Concrete Permeable Pavers

*Not for use on structures under hydrostatic pressure*



## LG Low Gloss Paver Seal



### Benefits

- ▶ Low-gloss finish
- ▶ Color enhancing
- ▶ Stabilizes joint sand from washout, etc.
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Provides UV protection
- ▶ Interior/exterior

### More Info.



[bitly.com/LGsealer](http://bitly.com/LGsealer)

### Applications

- ▶ Concrete Pavers

*Not for use on structures under hydrostatic pressure or permeable pavers*



## HG High Gloss Paver Seal



### Benefits

- ▶ High-gloss, wet-look finish
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Provides UV protection
- ▶ Stabilizes joint sand from washout, etc.
- ▶ Color enhancing

### Applications

- ▶ Concrete Pavers

*Not for use on structures under hydrostatic pressure or permeable pavers*



### More Info.



[bitly.com/HGsealer](http://bitly.com/HGsealer)

## HGX High Gloss X-treme Paver Seal Commercial Grade



### Benefits

- ▶ High-gloss, wet-look finish
- ▶ Minimizes salt and freeze/thaw damage
- ▶ Provides UV protection
- ▶ Ideal for high traffic or commercial areas
- ▶ Color enhancing

### Applications

- ▶ Concrete Pavers

*Not for use on structures under hydrostatic pressure or permeable pavers*



### More Info.



[bitly.com/HGXsealer](http://bitly.com/HGXsealer)

## DG Dual Guard Specialty Seal Commercial Grade



### Benefits

- ▶ 2 levels of protection in 1 application
- ▶ Long-lasting penetrating protection
- ▶ High-gloss, wet-look finish
- ▶ Acrylic/siloxane blend
- ▶ Commercial strength

### Applications

- ▶ Concrete Pavers
- ▶ Most Natural Stone
- ▶ Wetcast
- ▶ Cultured Stone

*Not for use on structures under hydrostatic pressure*



**Instructions**

[bitly.com/DGsealer](http://bitly.com/DGsealer)

## Clean Before Sealing for the Best Bond

Removing all surface stains is essential to getting the best-looking seal, but even if there is no evident staining on the surface, it's still important to use an SRW general purpose wash. Doing so will prepare the surface for optimal bond with the sealer.

### Specialty Clean

First, remove all surface stains with SRW Specialty Clean products.

### Paver Clean

Second, prepare the surface for sealing with Paver Clean PW Paver Wash.



## PW Paver Wash Paver Clean



### Benefits

- ▶ Opens surface pores for optimal bond with sealer
- ▶ Restores original paver color
- ▶ Contains no muriatic acid or hydrochloric acid
- ▶ Removes polyhaze, efflorescence and ground-in dirt

### Instructions



[bitly.com/PWinstruct](http://bitly.com/PWinstruct)



## EF Efflorescence Specialty Clean 2-in-1 Cleaner!



### Benefits

- ▶ Dissolves mineral deposits (efflorescence)
- ▶ Restores original surface color
- ▶ 2-in-1 cleaner—no need to follow up with Paver Wash!
- ▶ Contains no muriatic acid or hydrochloric acid
- ▶ Ready to use—no diluting needed

### Instructions



[bitly.com/EFInstruct](http://bitly.com/EFInstruct)



# The Best Formulas to Remove Stains & Revitalize Pavers

## TR Tar, Gum & Rubber Specialty Clean



### Benefits

- ▶ Removes tar, gum, rubber & paint
- ▶ Easy to use
- ▶ Rinses clean with water



Instructions

[bitly.com/TRcleaner](http://bitly.com/TRcleaner)

## OC Organic Stain Cleaner Specialty Clean



### Benefits

- ▶ Breaks down organic stains from leaves, wood tannins, pine needles, acorns, fruit, wine, etc.
- ▶ Rinses clean with water



Instructions

[bitly.com/OCcleaner](http://bitly.com/OCcleaner)

## MC Mold, Moss & Mildew Cleaner Specialty Clean



### Benefits

- ▶ Breaks down mold, moss & mildew
- ▶ Non-acidic, no-bleach formula
- ▶ No pressure washing, scrubbing or rinsing!



Instructions

[bitly.com/M3Cinstruct](http://bitly.com/M3Cinstruct)

## CD Cleaner & Degreaser Specialty Clean



### Benefits

- ▶ Removes grease, oil and dirt
- ▶ Rinses clean with water
- ▶ Fast-acting concentrated formula



Instructions

[bitly.com/CDinstruct](http://bitly.com/CDinstruct)

## RE Rust Eliminator Specialty Clean



### Benefits

- ▶ Removes rust and hard water stains
- ▶ Rinses clean with water
- ▶ Heavy-duty concentrated formula



Instructions

[bitly.com/REinstruct](http://bitly.com/REinstruct)

### How long should I wait after installing polymeric sand?



Wait for sand to fully cure before sealing. Be sure the moisture has been released. We recommend waiting at least 28 days.

### What do I use to clean up?



SRW XY Xylene is a fast-acting solvent that thins and dissolves acrylic sealer to aid in tool clean up and overspray.

### What if I need to remove sealer?



SRW has a solution for every need. SS Sealer Stripper is a biodegradable, yet industrial-strength formula that removes sealing and curing compounds.

### Can I seal if rain is in the forecast?



SRW recommends a clear forecast for at least 24 hours before and after sealer application.

### Is it necessary to use an SRW Slit Foam Roller?



Yes. A slit foam roller is the best choice for backrolling because it helps evenly distribute the sealer and prevent it from pooling.

### Is it necessary to use a sprayer to apply?



While you can successfully apply SRW sealers using only a Slit Foam Roller, it is highly recommended that a sprayer is used to apply an even coat. A second

person would then follow the sprayer with a slit foam roller to make sure the sealer is evenly distributed and prevent it from pooling.

## Professional-Grade Accessories to Get the Job Done Right

Look for these icons next to each sealer to know which accessories to use.



When you see this icon, you'll easily know which sprayer works best. Choose Hudson® Constructo® Spray Thick™ (black).



When you see this icon, we recommend to use the white sprayer for the VOC sealer and the black sprayer for the regular sealer.



We recommend using the Hudson Heavy-Duty Acetone Sprayer (white) with sealers marked with this icon.



When you see this icon, choose our regular slit foam roller.



We recommend using our new X-TREME roller for sealers marked with this icon.

SR Paver Grip can be added into many SRW sealers for slip resistance. Can be used with Paver Seal LG, HG, HGX & HGX VOC



See this icon? You decide which roller to use! Either of our rollers work great with sealers marked with this icon.



These icons identify solvent-based and water-based sealers.



This icon shows approximate coverage. Amounts listed are in square feet per gallon and may vary depending on surface and application.