

ENHANCE

Your Hardscape Projects

RESTORE

Beauty to Multiple Surfaces

PROTECT

Your Investment



Specialized Sealers for Multiple Surfaces

SRW PRODUCTS Specialty Seal™ APPLICATION CHART	Surface Material									SRW Sealer Benefits				
	Retaining Wall Block	Concrete Pavers	Granite/Quartz	Limestone	Marble/Travertine	Bluestone/Sandstone	Manufactured/Cultured Stone	Fieldstone/Boulders	Wetcast	Penetrating/Natural Look	Film-Forming/Enhancing	Reduce Salt/Frost Damage	UV Resistance	Stain Resistance
DG DUAL GUARD	X	X	X	X	X		X	X	X		X	X		X
RWX RETAINING WALL X-TREME	X						X			X				X
CG COUNTER GUARD	X	X	X	X	X	X	X	X	X	X			X	X

Always test a small area. Check product label for interior/exterior use. Refer to surface material manufacturer's recommendations on whether or not to seal.

RWX Retaining Wall X-treme

Specialty Seal



Instructions
bitly.com/RWXinstruct

Benefits

- ▶ Invisible/natural-look finish
- ▶ Ideal for commercial and residential applications
- ▶ Minimizes damage from salt, freeze/thaw and road spray
- ▶ Extends the life of the project
- ▶ DOT strength—meets specs in most states

Applications

- ▶ Concrete Retaining Walls

Not for use on structures under hydrostatic pressure



CG Counter Guard

Specialty Seal

Dirty Oil Wipes Right Off!



Benefits

- ▶ Protects surfaces from staining by water, oils, grease, wine, coffee, foods and more
- ▶ Invisible/natural-look finish

Applications

- ▶ Concrete
- ▶ Clay/Brick
- ▶ Cultured Stone
- ▶ Granite
- ▶ Bluestone
- ▶ Sandstone

Not for use on structures under hydrostatic pressure



Instructions

bitly.com/CGinstruct



NEW ADVANCED TECHNOLOGY: 2 Levels of Protection in One Easy Coat

Works on Multiple Surfaces!

Natural Stone




Pavers



Wetcast



NEW ADVANCED TECHNOLOGY

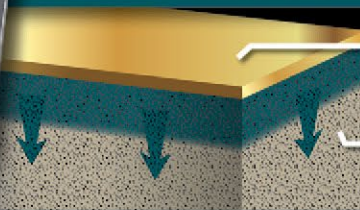

Premium Acrylic High Gloss Finish

plus

Powerful Siloxane Penetrating Protection

DG Dual Guard Specialty Seal Commercial Grade



Instructions
bitly.com/DGsealer

Benefits

- ▶ 2 levels of protection in 1 application
- ▶ Long-lasting penetrating protection
- ▶ High-gloss, wet-look finish
- ▶ Acrylic/siloxane blend
- ▶ Commercial strength

Applications

- ▶ Concrete Pavers
- ▶ Most Natural Stone
- ▶ Wetcast
- ▶ Cultured Stone

Not for use on bluestone/sandstone or structures under hydrostatic pressure



More Info.

What if there are stains on my surface?

Clean the area with one or more of these SRW Specialty Clean™ products **before** you seal. Scan the QR code or go to bitly.com/SpecialtyClean for more information



OC Organic Stain Cleaner



Benefits

- ▶ Removes tar, gum, rubber and paint
- ▶ Easy to use
- ▶ Rinses clean with water

TR Tar Gum & Rubber Remover



Benefits

- ▶ Breaks down organic stains from leaves, pine needles, acorns, fruit, wine, etc.
- ▶ Rinses clean with water

MC Mold, Moss & Mildew



Benefits

- ▶ Breaks down mold, moss, mildew, lichen and algae
- ▶ Non-acidic, no-bleach formula
- ▶ No scrubbing or rinsing!

CD Cleaner & Degreaser



Benefits

- ▶ Removes grease, oil and dirt
- ▶ Rinses clean with water
- ▶ Heavy-duty concentrated formula

RE Rust Eliminator



Benefits

- ▶ Removes rust and hard water stains
- ▶ Rinses clean with water
- ▶ Fast-acting concentrated formula

What do I use to clean up after sealing?



SRW XY Xylene is a fast-acting solvent that thins and dissolves acrylic sealer to aid in tool clean up and overspray.

What if I need to remove sealer?



SRW has a solution for every need. SS Sealer Stripper is a biodegradable, yet industrial-strength formula that removes sealing and curing compounds. Not for use on Cultured Stone.

How do I decide what roller to use?



SRW makes it easy to find out which roller we recommend using with each sealer. Simply check the icon next to each product. If both are shown, use either the yellow or grey SRW slit foam rollers—the choice is yours!

How do I decide what sprayer to use?



The icon next to each product will show which sprayer SRW recommends. The white sprayer is the Hudson® Heavy-Duty Acetone sprayer and the black sprayer is the Hudson Constructo® Spray Thick™ sprayer.

Can I seal if rain is in the forecast?

SRW recommends a clear forecast for at least 24 hours before and after sealer application.

